


Samsung DB40D/E, DM40D/E, DH40D/E Touch Screen Overlay



Samsung Authorized Solution
SAMSUNG

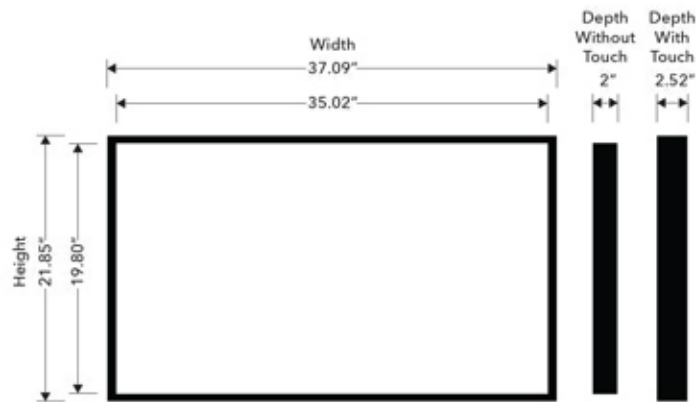

Advanced Interactive Collaboration Solution

This overlay is an Infrared (IR) based solution, which allows for a high accuracy interactive experience. The usage of IR technology allows for virtually any input to be detected (pen/stylus, user's fingers, palms, gloved fingers). The 40" overlay is a full steel chassis integrated with anti-reflective tempered cover glass, which increases durability and optical clarity, while protecting the display.



Multi-Touch Screen
True multi-touch support with up to six simultaneous touch points for all major operating systems



Easy Integration
Unrivaled simplicity makes installation easier and faster



Ultra-Fast Response Time
Allows for split second reactions between touch point and screen



HID Compliant
Maximum compatibility with numerous operating systems, plug-and-play



Superior Design
Full steel chassis combined with anti-reflective tempered glass provides additional protection to the LCD panel



Customizable
Custom colors and silk screening available

Specifications

Display Compatible	DB40D/E, DM40D/E, DH40D/E, DC40E
Protective Glass	1/8" Anti-Reflective Tempered Glass
Frame Material	Black Powder Coat Seal
Touch Technology	IR
Touch Points	6 Point (10 Point Optional)
Response Time	6 - 16ms
Touch Accuracy	+/- 2mm (Over 99% Area)
Interface	Type A USB/M
Communication	USB 2.0
Remote Control Receiver	Extender Needed
Receiver Extender	BN39-01899A
Power Supply Mode	USB
Width/Height/Depth Including Monitor	37.09" x 21.85" x 2.52"
Weight (Without Monitor)	17.6 lbs
Boxed Weight	19.84 lbs
Boxed Dimensions	39.4" x 25.0" x 7.7"
OS Support	Windows, Google Chrome, Android, Mac, Linux