



## Double-Sided Flat OLED Signage



Cutting edge OLED technology has allowed us to bring you an innovative Dual Sided Flat OLED Signage Screen that has perfect picture quality with a revolutionary pencil-thin design! With self-lighting pixels, wide viewing angle, and 5,000 times faster motion response time, this is on of the most impactful Digital Signage Solutions for any event need nationally!

### Three Types of Installation

Dedicated accessories available for wall mount, ceiling, and stand.

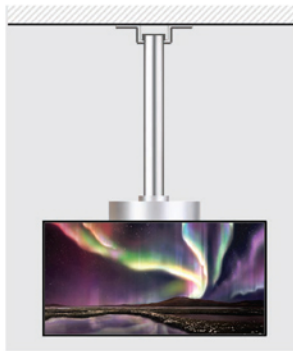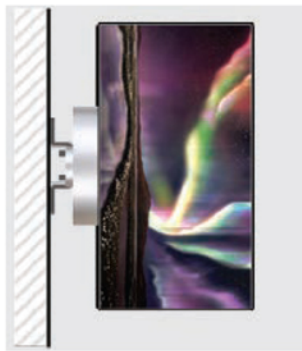

### Features



**Perfect Black**

Limitless contrast and deepest black



**Perfect Color**

Accurate & stable color reproduction



**Perfect Viewing Screen**

Wide viewing angle



**Crisp, Clear Motion**

Faster response time



**Perfect Design**

Slim and light

# Specifications



## 55EH5C

- Brightness : 400 cd/m2 (APL 25%) \*Average Picture Level
- Bezel : 2, 2, 2, 2 mm (U, B, L, R \*Off-bezel)
- Depth : 7.94 mm
- Interface : HDMI / DP / DVI / RS232C / RJ45 / IR In / USB / Audio
- SuperSign W-Lite/C
- Content Mirroring or Swapping Capabilities



PANEL	Screen Size	55"
	Panel Technology	OLED
	Aspect Ratio	16:09
	Native Resolution	1920 x 1080 (FHD)
	Brightness	100/400 cd/m2 (APL 100 % / 25 %) * Average Picture Level
	Contrast Ratio	100,000 : 1
	Viewing Angle (H x V)	178 x 178
	Response Time	1 ms (G to G), 8 ms (MPRT)
	Surface Treatment	Hard coating (2H), Anti-reflection treatment of the front polarizer (Reflectance Typ.1.0%)
	Operation Hours	18 hrs / 7 days (moving video only)
CONNECTIVITY	Orientation	Portrait & Landscape
	Input	HDMI (1+1), DP (1+1), DVI-D (1+1)
	Output	Audio (1+1)
PHYSICAL SPECS	External Control	RS232C (1+1), RJ45 (1+1), IR Receiver, USB 2.0 (2), USB 3.0 (2)
	Bezel Color	Silver
	Bezel Width	2, 2, 2, 2 mm (U, B, L, R *Off-bezel)
	Dimensions (W x H x D)	Head : 48.3" x 27.7" x 0.3" (Edge depth : 0.36") Signage Box : 18.5" x 15.9" x 3"
	Weight	Head : 46.3 lbs / Signage Box : 17.6 lbs
ENVIRONMENT CONDITIONS	Operation Temp	32° F to 104° F
	Operation Humidity	10 % to 80 %
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In
	Typical Power	375W
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes
	External Media Player Attachable	Yes
	SuperSign W-Lite	Yes
	SuperSign C	Yes
ACCESSORY	Standard	Remote Controller (included 2ea batteries), Power Cord, QSG, Mini HDMI Cable (3M x 2ea, for connection between head and signage box), Power Hanness Cable (3M x 2ea, for connection between head and signage box), Regulation Book, Phone to RS232C Gender, Jack Cover, Signage Box Mounting Bracket
FEATURES	Special Features	Temperature Sensor, Cooling FAN, Source Selection, DPM Select, Energy Saving, Motion Eyecare, Power Indicator On/Off, File Play with USB, Internal Memory (8 GB), Wi-Fi Dongle Ready, USB Cloning, Contents Scheduling, Local time auto setting, Fail over, Mirroring, SoftAP, BEACON