


TOUCH VIDEO WALL OPTIONS


NEC X464UN-2, X554UN-2

Available in up to 222", we offer you several solutions for Video Wall Touch Technology. Capture your audience with interactive ability, size, and vivid LED colors. You can engage, share and collaborate with up to 32-simultaneous touch points! Bring your content to life on a Touch Video Wall Rental at your next event.

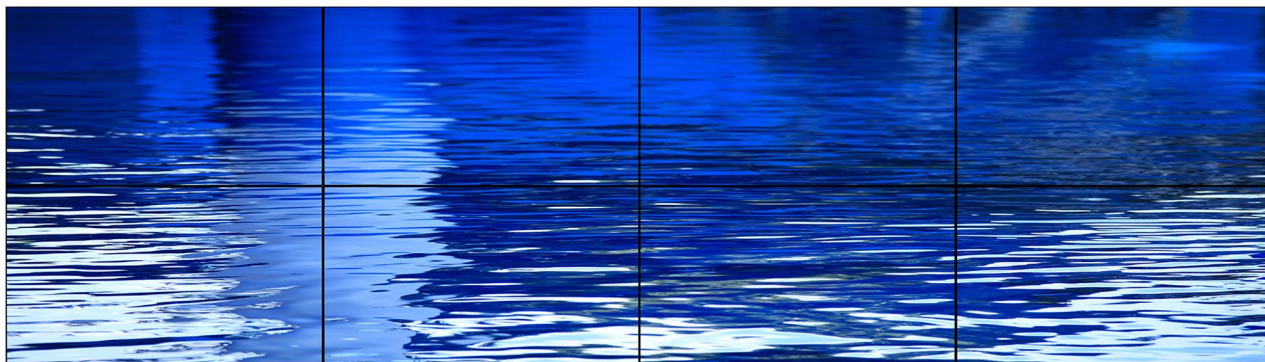

OPTIONS

- 222" (17.1'W X 7.9'H) 5WX4H X464UN ARRAY
- 208" (16.2'W X 7.1'H) 4WX3H X554UN ARRAY
- 198" (16.2'W X 4.8'H) 4WX2H X554UN ARRAY
- 186" (13.8'W X 7.9'H) 4WX4H X464UN ARRAY
- 167" (10.4'W X 9.8'H) 3WX5H X464UN ARRAY
- 165" (12.3'W X 7.1'H) 3WX3H X554UN ARRAY
- 146" (12.3'W X 2.6'H) 3WX1H X554UN ARRAY (LANDSCAPE)
- 138" (10.4'W X 6.1'H) 3WX3H X464UN ARRAY
- 118" (4.3'W X 9.3'H) 1Wx4H X554UN ARRAY
- 110" (8.3'W X 4.8'H) 2WX2H X554UN ARRAY
- 100" (3.7'W X 7.9'H) 1WX4H X464UN ARRAY
- 72" (4.8'W X 4.3'H) 2WX1H X554UN ARRAY (PORTRAIT)

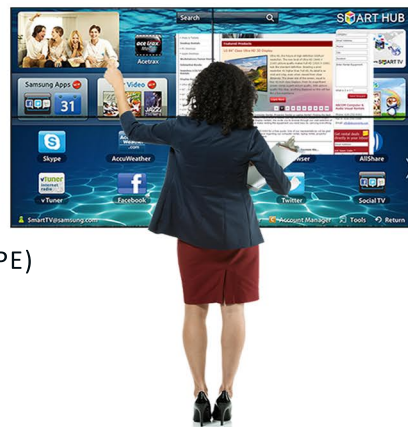

SPECIFICATIONS

Surface Material	Aluminum Frame
Detectable Touch Points	32 Touch Points
Response Time	7-16ms
Touch Accuracy	~1.5mm
Report Resolution	32768X32768
Touch Recognition Method	IR Based
Programming Interface	SDK / Windows Native Touch, TUIO
Interface	USB 2.0, Compatible with USB 1.1 port USD A Type Receptacle
AC Input Voltage	110/220V
Power Supply	5V/4A Power Adapter